



Referencia - Reference

K4A / K6A / K7A

Categoría - Category


Structure

Descripción - Description


Línea de luz empotrable de reducida altura y gran eficiencia lumínica.

Recessed light with reduce height and high light efficiency.

Curva fotométrica - Photometric curve

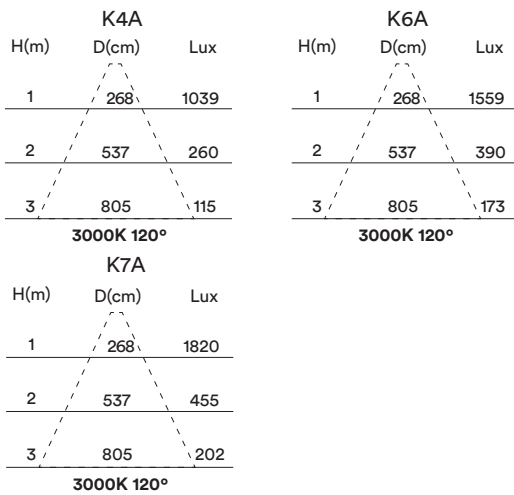

Dimensiones en mm - Dimensions in mm

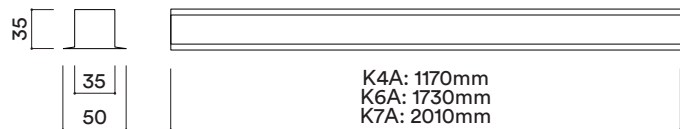

Información técnica - Technical information

					CRI	
K4A/27	35W	120°	2700K	2905lm	80	L70>50.000H
K4A/30	36W	120°	3000K	2735lm	80	L70>50.000H
K4A/40	36W	120°	4000K	2940lm	80	L70>50.000H
K6A/27	53W	120°	2700K	4355lm	80	L70>50.000H
K6A/30	55W	120°	3000K	4105lm	80	L70>50.000H
K6A/40	55W	120°	4000K	4410lm	80	L70>50.000H
K7A/27	62W	120°	2700K	5080lm	80	L70>50.000H
K7A/30	65W	120°	3000K	4790lm	80	L70>50.000H
K7A/40	65W	120°	4000K	5150lm	80	L70>50.000H

Información adicional - Additional information



1174x37mm
1734x37mm
2014x37mm

Regulación - Dimming

