

Straight XL Base



Referencia - Reference

2229


Categoría - Category

Surface

Descripción - Description

Proyector de base de excelente acabado y confort visual.
Base projector with excellent visual comfort and finish.

Dimensiones en mm - Dimensions in mm

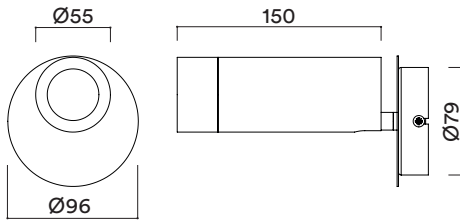

Curva fotométrica - Photometric curve

12W			12W			12W		
H(m)	D(cm)	Lux	H(m)	D(cm)	Lux	H(m)	D(cm)	Lux
1	45	4037	1	69	2969	1	97	2090
2	90	1009	2	138	742	2	193	523
3	135	449	3	207	330	3	290	85
3000K 25°			3000K 43°			3000K 60°		
9W			9W			9W		
H(m)	D(cm)	Lux	H(m)	D(cm)	Lux	H(m)	D(cm)	Lux
1	41	2710	1	74	1403	1	121	939
2	83	678	2	147	351	2	242	235
3	124	301	3	221	64	3	363	104
3000K 20°			3000K 40°			3000K 60°		

Accesorios - Accessories

- FL055** Cristal Transparente - Transparent Glass
- FL060** Cristal Glaseado - Frosted Glass
- FL040** Difusor Panal abeja - Honeycomb Diffuser

Información técnica - Technical information

⊕	⚡	∠	°K	☀	CRI	⌚
2229/27	12W	25°/43°/60°	2700K	1080lm	90	L70>50.000H
2229/30	12W	25°/43°/60°	3000K	1217lm	90	L70>50.000H
2229/40	12W	25°/43°/60°	4000K	1318lm	90	L70>50.000H
2229/27	9W	20°/40°/60°	2700K	683lm	90	L70>50.000H
2229/30	9W	20°/40°/60°	3000K	779lm	90	L70>50.000H
2229/40	9W	20°/40°/60°	4000K	870lm	90	L70>50.000H

Información adicional - Additional information

Regulación - Dimming

